

DIGITAL CALIPERS WITH INTERCHANGEABLE POINTS

DATA
OUTPUT




short spherical/flat points (included)



Unit: mm

long spherical/flat points (included)




Unit: mm

short spherical blade points (included)



Unit: mm

long spherical blade points (included)




Unit: mm



1124-300A


zero setting block for
external measurement
(included)

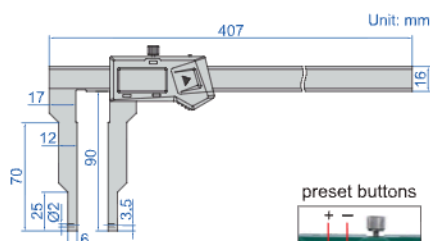


preset buttons




measure internal and
external grooves



spherical points for groove
(inside hole) measurement




spherical blade points for
narrow groove (inside hole)
measurement



flat points for external
groove measurement

- Non waterproof
- Supplied with 4 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: points (code 1526-T101, 7392, 7391, 7381, 7321), depth stop (code 6143)

install points



depth stop 6143
(optional)



With data interface

Code	Data output cable (optional)
1124-300A	7315-25 (receiver is needed), 7302-21

Built-in wireless

Code	Receiver (optional)
1124-300AWL	code 7315-2/3/6/7/8/9

Point	Range	Accuracy	Application
short spherical/flat points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	spherical points for grooves inside hole (small hole) flat points for external grooves
long spherical/flat points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	spherical points for grooves inside hole (large hole) flat points for external grooves
short spherical blade points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	for narrow grooves inside hole (small hole)
long spherical blade points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	for narrow grooves inside hole (large hole)

Multifunctional points 7392* (optional)



Ball points 7391* (optional)



Screw thread points 7381*, 7321* (optional)



* It is necessary to use point sleeve (code 1526-T101) for these points