







- Non waterproof
- Buttons: on/off, set, mm/inch, ABS, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel

With data interface (optional data output cable: code 7315-22 receiver is needed page 5, 7214-22 page 11, 7302-22 page 20)


Code	Range*	Resolution	Accuracy	L
1125-600	0-600mm/0-24"	0.01mm/0.0005"	±0.05mm	778mm
1125-1000	0-1000mm/0-40"	0.01mm/0.0005"	±0.07mm	1205mm

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

•		,		
Code	Range*	Resolution	Accuracy	L
1125-600WL	0-600mm/0-24"	0.01mm/0.0005"	±0.05mm	778mm
1125-1000WL	0-1000mm/0-40"	0.01mm/0.0005"	±0.07mm	1205mm

^{*}The range changes according to different points


1125-600







UNIVERSAL CALIPERS

Half disk points (included)






measuring external groove diameter with flat measuring face (depth h1≤2.5mm)




measuring internal groove diameter with spherical measuring face (depth h2≤7.5mm)


Conical points (optional)

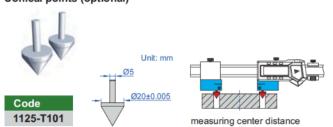




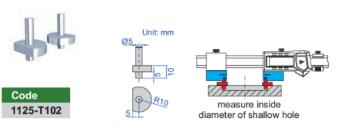


Flat shoulder points (optional)






Spherical points (included)

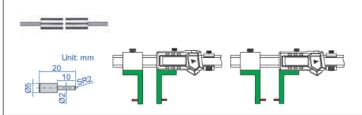

Point sleeve (optional)







Stands (included)




Unit: mm

Continued from previous page

Depth stop (included)



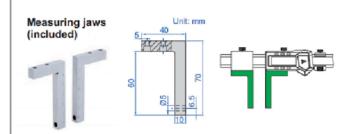

Multifunctional points 7392* (optional, page 52)



*It is necessary to use point sleeve (code 1125-T104) for these points

Ball points 7391* (optional, page 52)



Screw thread points 7381*, 7321* (optional, page 52)

